

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 15 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC.
- 5.ELECTRIC STRENGTH : 1000V AC RMS 50HZ 1MIN.

MECHANICAL:



- 1.HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm.
- 3.PLATING : GOLD PLATING OVER NICKEL.
- 4.OPERATING : 750 CYCLES MIN.
- 5.PCB RETENTION PRE-SOLDER : 1LB MIN.

ENVIRONMENTAL:

- 1.Temperature Range : -40°C~+85°C
- 2.Relative Humidity : 90~95% (40~27°)

PART NUMBER:

DY9720 - X XX XX X - X X X L

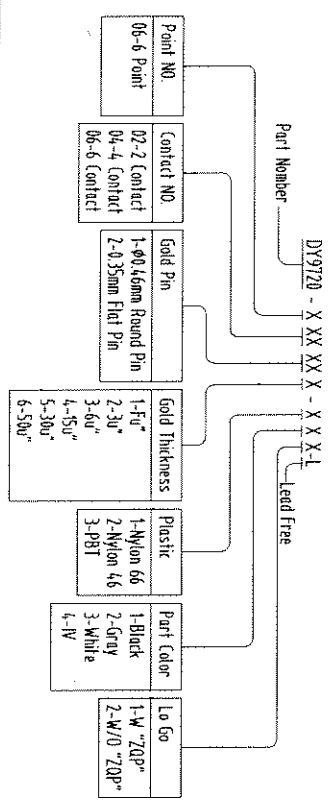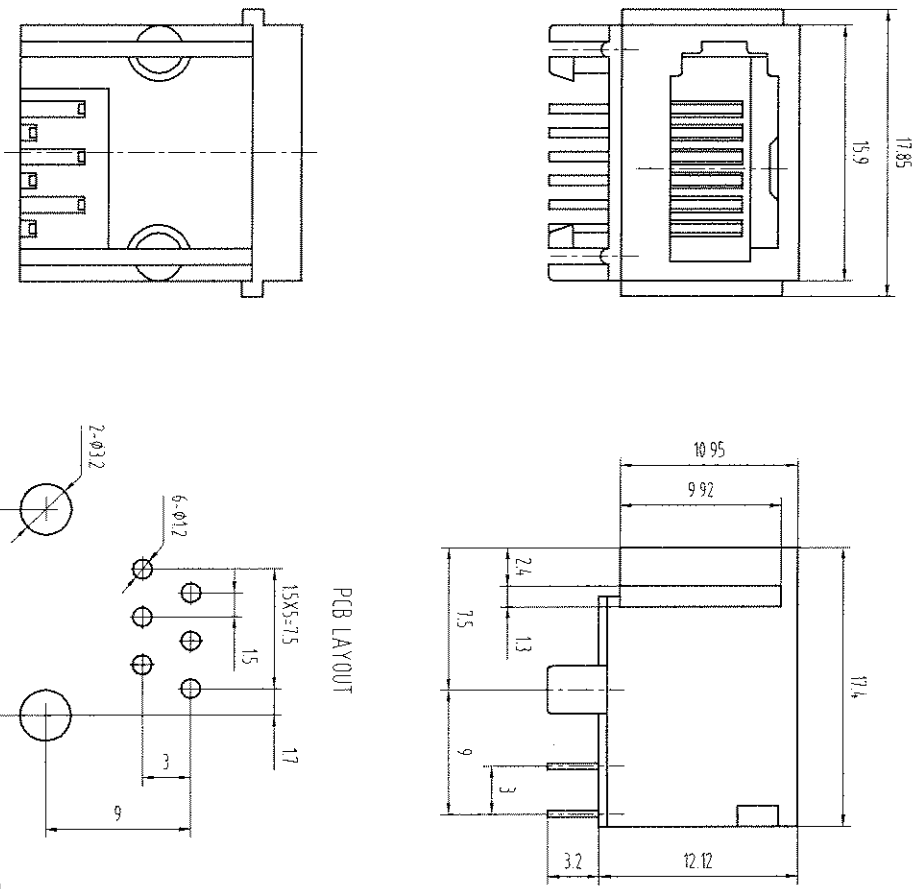

DETACHED LISTS			
mm (Inch)	DATE: 2006.03.16	DATE: 2006.03.16	DATE: 2006.03.16
Tolerance Except as Noted	CHKD:	DATE:	DATE:
MIN	APPV:	DATE:	DATE:
0±0.2			
0±0.15			
0.00±0.015			
ANGLES ± 0.5	MATERIAL:	DRAWING NO. /PART NO.	
	QTY:	DY9720-060623-332-L	
	FINISH:	SIZE	REV
	SCALE: 2:1	A4	0
		SHEET	OF

DUOYUAN TELECOM PRODUCTS CO.,LTD

DY9720-060623-332-L

ZCON224X